

# SIDE SLIDING DOORS

**RESIDENCIAL**



**Flexidoor**  
AUTOMATIC DOORS MANUFACTURER

[WWW.FLEXID00R.PT](http://WWW.FLEXID00R.PT)





# SIDE SLIDING DOOR



## RECOGNIZED QUALITY

Flexidoor sectional doors fulfil all the safety requirements of the EN 13241-1:2003 standard.



Flexidoor considers the innovation a form of learning about the new ways of offering a better product to our customers. As well as the continuous efficiency gains demand with the objective of creating value for the entire organization and its partners.

Thus, the day by day R&D Department

work is filled with new challenges that we believe define who we are.

This is our identity.

This is our future.

# SIDE **SLIDING** DOOR COMPOSITION





## WHAT ARE THE ADVANTAGES OF A SIDE SLIDING DOOR?

ENTRANCE COMPLETELY FREE OF OBSTACLES EVEN WITH A LOW LINTEL.



**01**

Top track in galvanized steel And a roller system with 2 ball bearings rollers, equipped with an Anti-entrapment protection.



**04**

Pedestrian entrance due to an easy partial opening. Door can be partly opened for letting in pedestrians, eliminating the need of an Pass Door, enhancing the comfort of an passage without obstacles, which is an important attribute in daily use of your garage.



**02**

Side profile in aluminium in which a rubber seal is applied which ensures a greater tightness.



**05**

Simplicity of functioning with sliding opening. Perfectly adaptable to any type of garage with lack of space in new or existing buildings.



**03**

Bottom track in galvanized steel, which guides the panel, with fixing holes to the ground


### NOTE

- Manufacture to the measure needed up to 5m of width x 2,5m of height.
- Corners only available with 90°.



## REQUIRED INSTALLATION SETS AND TECHNICAL DIMENSIONS

- If the side wall of the opening (on the curve rail side), has a dimension greater than 700mm, the engine could be mounted in the lintel.
- If the two side walls have a dimension equal or smaller than 700mm, the engine must be mounted on the sidewall of the opening installation place.

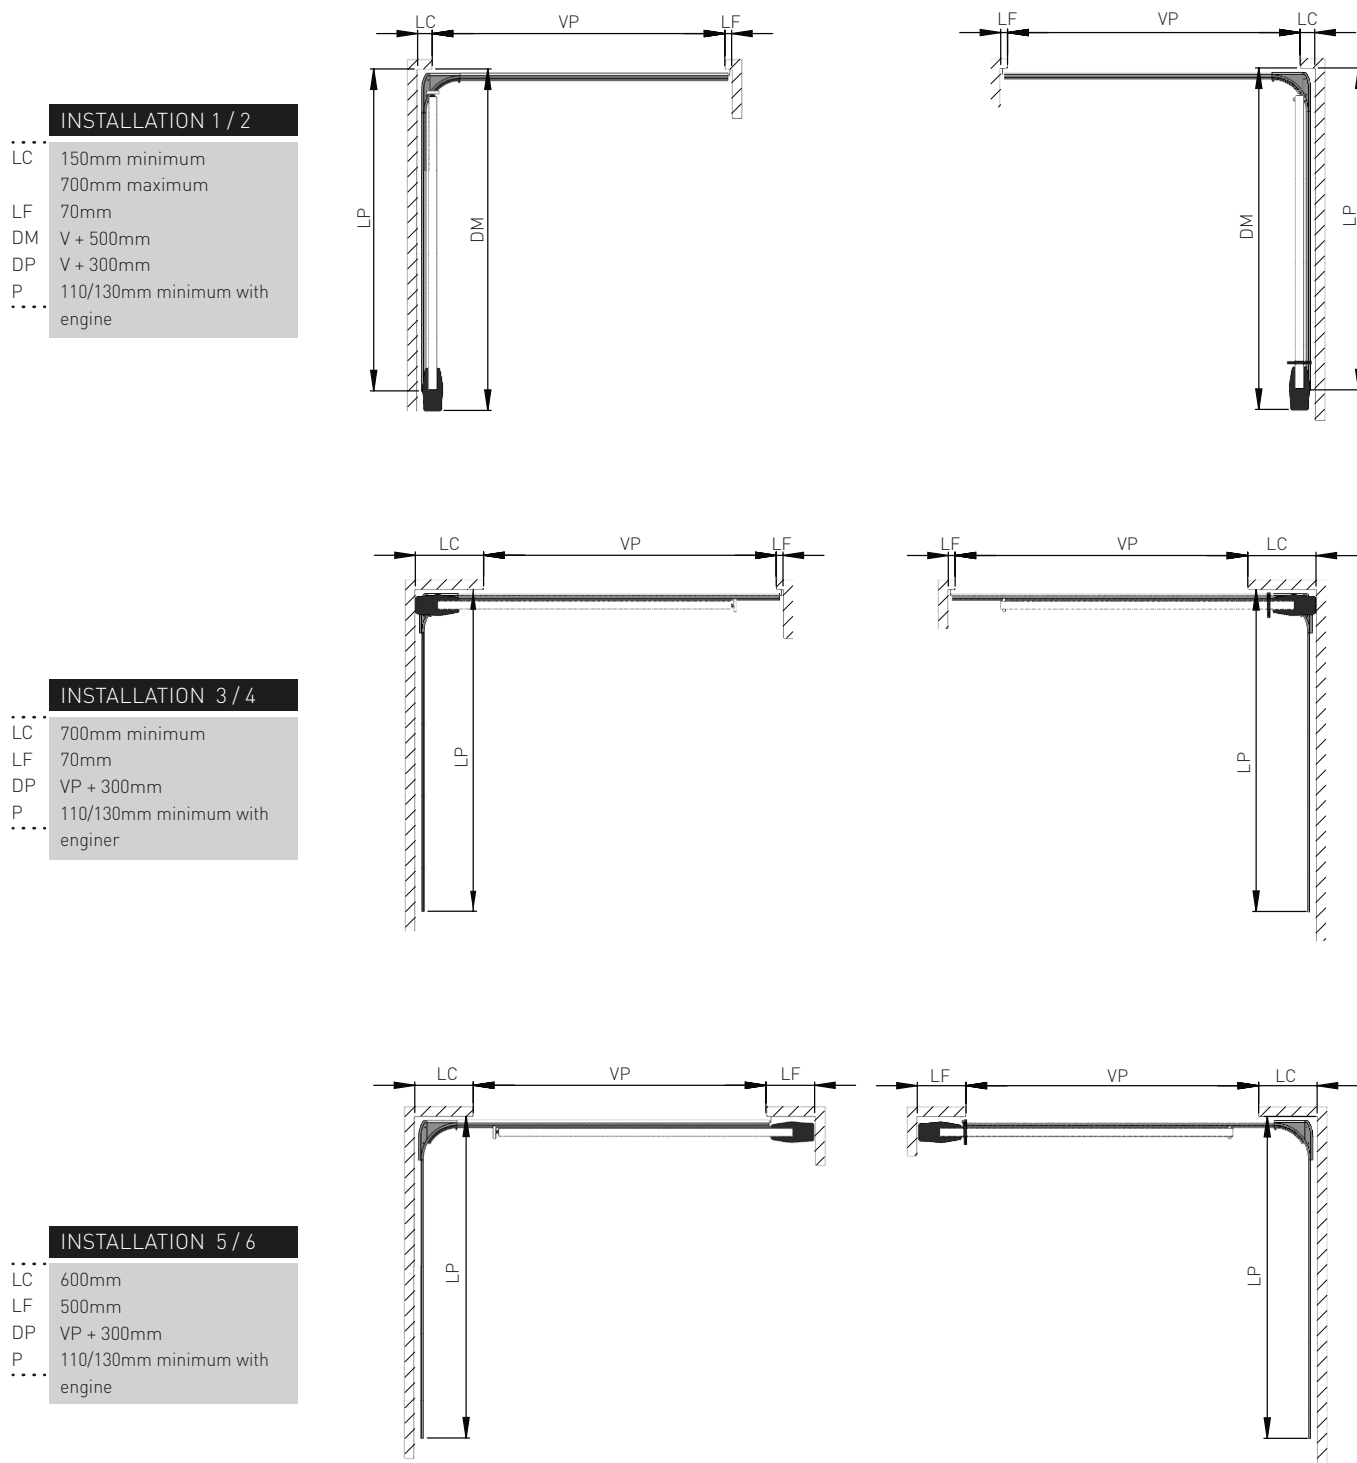

**LEGEND** • **LC** · Lateral curve side • **LF** · Lateral close side • **VP** · Installation opening measure • **DM** · Wall measure needed for engine  
• **DP** · MWall measure needed for manual door • **P** · Headroom









RUA DA MAJOEIRA, Nº 400  
APARTADO 542  
2415 - 184 REGUEIRA DE PONTES  
LEIRIA • PORTUGAL

TEL. +351 244 850 470

FAX. +351 244 850 471

INFO@FLEXIDOOOR.PT

**WWW.FLEXIDOOOR.PT**

BROLAT.EN.10.19

DISTRIBUTOR

Cofinanciado por:



UNIÃO EUROPEIA  
Fundo Europeu  
de Desenvolvimento Regional