

# HIGH SPEED DOORS

## ROLL-UP / FOLDING



WWW.FLEXIDOOR.PT

 **Flexidoor**  
AUTOMATIC DOORS MANUFACTURER



Management  
System  
ISO 9001:2015  
www.tuv.com  
ID 9105074750

## RECOGNIZED QUALITY

Flexidoor sectional doors fulfil all the European standards for safety requirements. All the safety components are an integral part of our door, giving our customers the guarantee that our products are designed to ensure safety and well-being.



## TECHNICAL ASSISTANCE

Flexidoor has a specialized and skilled technical team which offers you all the necessary support since the planning up to the installation phase. This way, safety will be at your side during the time of work execution.

## WELL-BEING IS ALWAYS ON OUR MIND!

Nowadays aesthetic appearance of our homes has a huge importance, even because it is fundamental that we feel good in what is, after all, our home. So we have at your disposal different types of sectional doors with the most varied settings so that you can always get what you want.



# HIGH SPEED DOORS



## FLEXIDOOR

The Flexidoor high speed Doors are the perfect solution to fulfil the requirements for intensive use and isolation of spaces with different environments and characteristics. Solid and practical, they are the best solution for either a small or large passages, and to separate them by different

types of environments. Supermarkets, hypermarkets, warehouses, loading docks, platforms, laboratories and pavilions are all places where isolation is essential, and all of them find in this product the most flexible, viable and robust response.


# HIGH SPEED ROLL-UP DOORS




Our doors are ideal to high traffic passages and divide different areas. The high speed roll-up doors can be manufactured to a maximum width of 4500 mm and maximum height of 4500 mm. The doors have an attractive design and are composed by a lacquered aluminium structure, fixed to the wall with galvanized steel screws.

WIND RESISTANCE [Pa]	CLASS	[Pa]	Km/h
High speed roll-up door (for indoor use only)	1	300	80,46

## AVAILABLE COLOURS

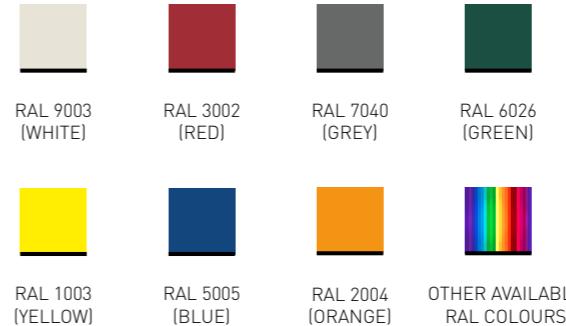

APPLICATION: INTERIOR DOOR	SOMMER
Maximum passage measure	4500mm x 4500mm
Minimum passage measure	1000mm x 2000mm
Electricity supply	230 V
Current rating	2 A
Gear motor	Sommer
Revolutions per minute	140 rpm
Phases	3-230/400 V
Power	0,55 kw
Degree of motor protection	IP54
Opening speed	0,8 m/s a 1,2 m/s
Working temperature	-5 °C a +60 °C
Daily operations	± 1000
Automatic closing	0 s a 999 s
Power supply for accessories	12 Vac
Traction type	Direct
Curtain material	P.V.C.
Curtain weight	950 gr/m2
Curtain thickness	0,8 mm
Transparent material	P.V.C.
Transparent section thickness	2,2 mm
Frequency	50/60 Hz
Base of machine	Aluminium
Machine cover	Aluminium
Engine cover	Optional
Vertical guides	Aluminium
Safety edge system	Light curtain

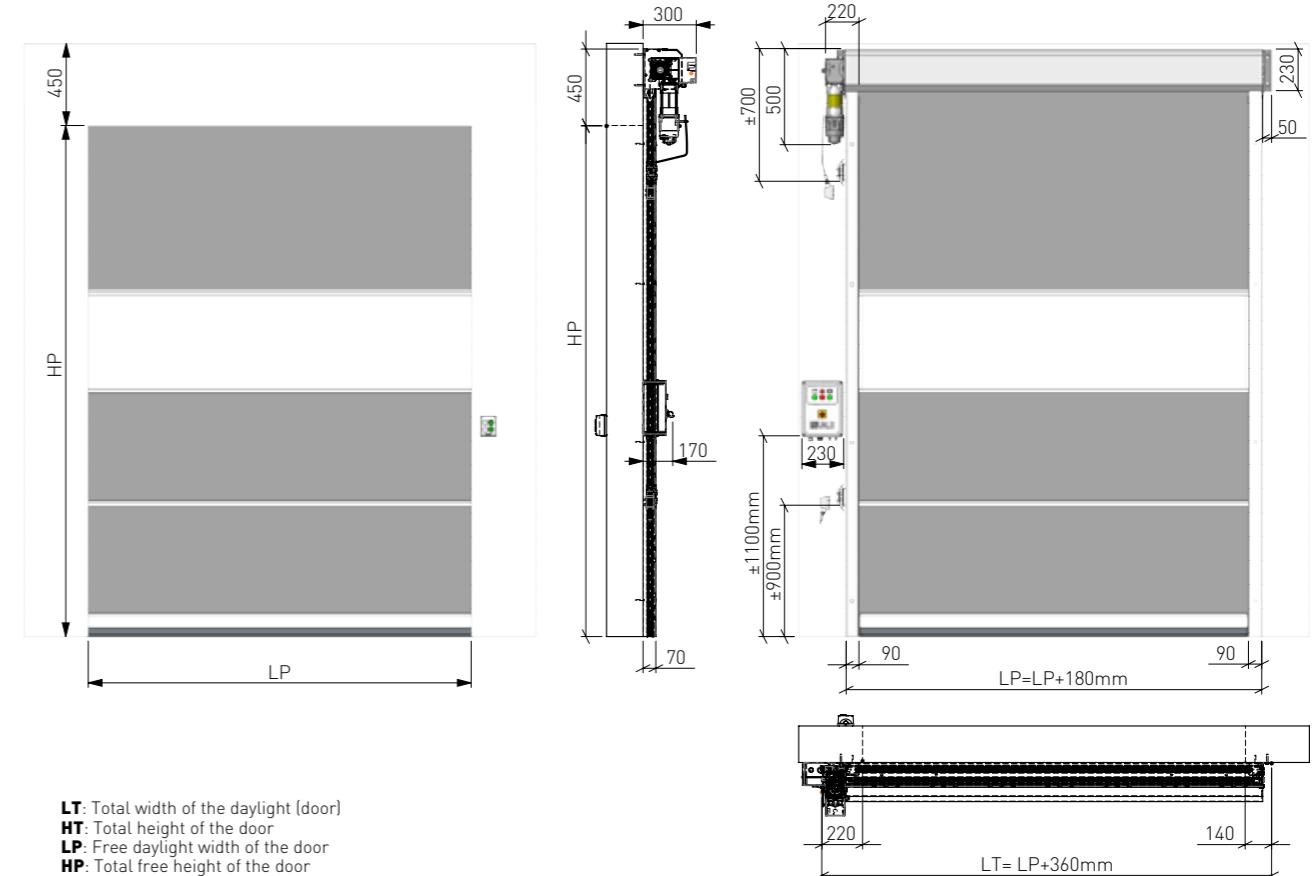

# HIGH SPEED FOLDING DOORS



## A PRACTICAL, ROBUST MODEL AND IDEAL FOR MEDIUM AND LARGE PASSAGES!


The Flexidoor high speed folding doors are versatile and robust, and meet all demands necessary for intensive use and can be applied in any room, even for large windy areas.

WIND RESISTANCE [Pa]	CLASS	[Pa]	Km/h
High speed folding doors (Maximum dimension up to 2,75 x 3m)	3	450	98,56
High speed folding doors (Dimension bigger than 2,75 x 3m)	2	700	122,93

## AVAILABLE COLOURS



APPLICATION: EXTERIOR/INTERIOR DOOR		SOMMER	MOTOVARIO
Maximum passage measure	8000mm x 6000mm	8000mm x 6000mm	8000mm x 6000mm
Minimum passage measure	1000mm x 2000mm	1000mm x 2000mm	1000mm x 2000mm
Electricity supply	400 V	400 V	400 V
Current rating	3,2 A	3,6 A	3,6 A
Gear motor	Sommer	Motovario	Motovario
Revolutions per minute	130 rpm	130 rpm	130 rpm
Phases	Three-phase	Three-phase	Three-phase
Power	1 kw	1,5 kw	IP54
Degree of motor protection	IP54	0,7 m/s a 1,2 m/s	0,7 m/s a 1,2 m/s
Opening speed	0,7 m/s a +60 °C	-5 °C a +60 °C	-5 °C a +60 °C
Working temperature	± 1000	± 1000	± 1000
Daily operations	0 s a 30 s	0 s a 30 s	0 s a 30 s
Automatic closing	24 V	12V / 24V	12V / 24V
Power supply for accessories	Direct	Direct	P.V.C.
Traction type	P.V.C.	950 gr/m2	950 gr/m2
Curtain material	Curtain weight	0,8 mm	0,8 mm
Curtain weight	Curtain thickness	P.V.C. Mica	P.V.C.
Curtain thickness	Transparent material	2,2 mm	2,2 mm
Transparent material	Transparent section thickness	50 Hz	60 Hz
Transparent section thickness	Frequency	Galvanized	Galvanized
Frequency	Base of machine	Galvanized	Galvanized
Base of machine	Machine cover	Optional	Optional
Machine cover	Engine cover	Galvanized	Galvanized
Engine cover	Vertical guides	Radio	Radio
Vertical guides	Safety edge system	Mirror	Mirror
Safety edge system	Safety Photocells		

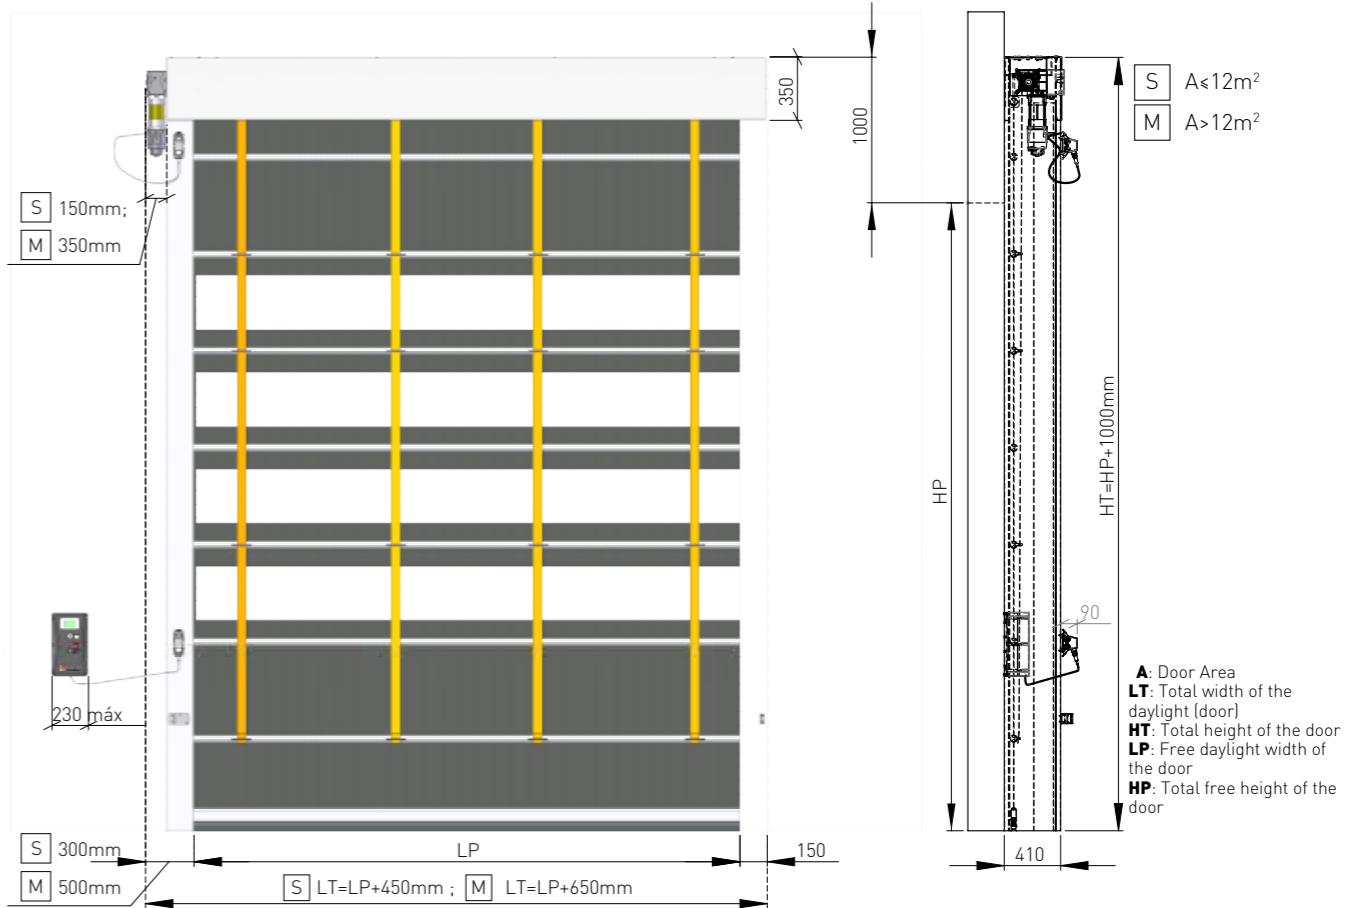

# COMPOSITION OF A FLEXIDOOR **HIGH SPEED DOOR**

## OPENING AND SAFETY SYSTEMS

### PRESSURE BUTTON

From the outside, this component allows to open and close the high speed door.




### MAGNETIC DETECTOR

In order to allow easier access, Flexidoor can provide you with a magnetic detector for opening the door with the simple passage of an object with a high metal content. This option comprises a spiral cable that, together with micro switches, enables different types of sensitivity adjustments so that it can function even in areas where there are large quantities of metal. This component is discreet since it is built-in into the floor



### TIE ROD

Another option for opening that may be part of a Flexidoor high speed door. This component uses rope that hangs from a considerable height so that it can be pulled for opening the door by a forklift operator



### INFRARED RADAR


Thinking of all the possibilities, Flexidoor provides its doors with infrared radars that allow the doors to open when movements within a maximum radius of 8m are detected.



## FLEXIDOOR HIGH SPEED DOOR OPTIONS

### RADIO CONTROL

Comfort is not set aside even with doors used in industrial environments. For this reason, Flexidoor provides radio frequency control emitters, this way the doors can be opened from an approximate distance of a 100m by way of a simple push of the button.



### LIGHT CURTAIN

In case of obstacle detection, this component stops the high speed door. Available up to 2650mm in height.



### FLASHING LIGHT

The beacon light is another component that Flexidoor provides as an option to be applied on its doors. Installing this component enables the signalization of the movements of our doors, functioning whenever they are closing or opening. As an alarm, it is undoubtedly a very efficient safety system allowing the pedestrian to easily check whether the door is in operation, avoiding possible accidents.



### EXTERNAL RECEIVER

The external receiver EXT2 have 2-channel rolling-code 433.92 MHz with 999 codes memory with plug-in for multiple applications.





RUA DA MAJOEIRA, Nº 400  
APARTADO 542  
2415 - 184 REGUEIRA DE PONTES  
LEIRIA • PORTUGAL

TEL. +351 244 850 470  
FAX. +351 244 850 471  
INFO@FLEXIDOOR.PT  
**WWW.FLEXIDOOR.PT**

CATRAP.EN.01.18

DISTRIBUTOR

Cofinanciado por:



UNIÃO EUROPEIA  
Fundo Europeu  
de Desenvolvimento Regional